


INSTALLATION DIAGRAM

The Greenwald Pay device installs in-between the machine control panel and the coin drop

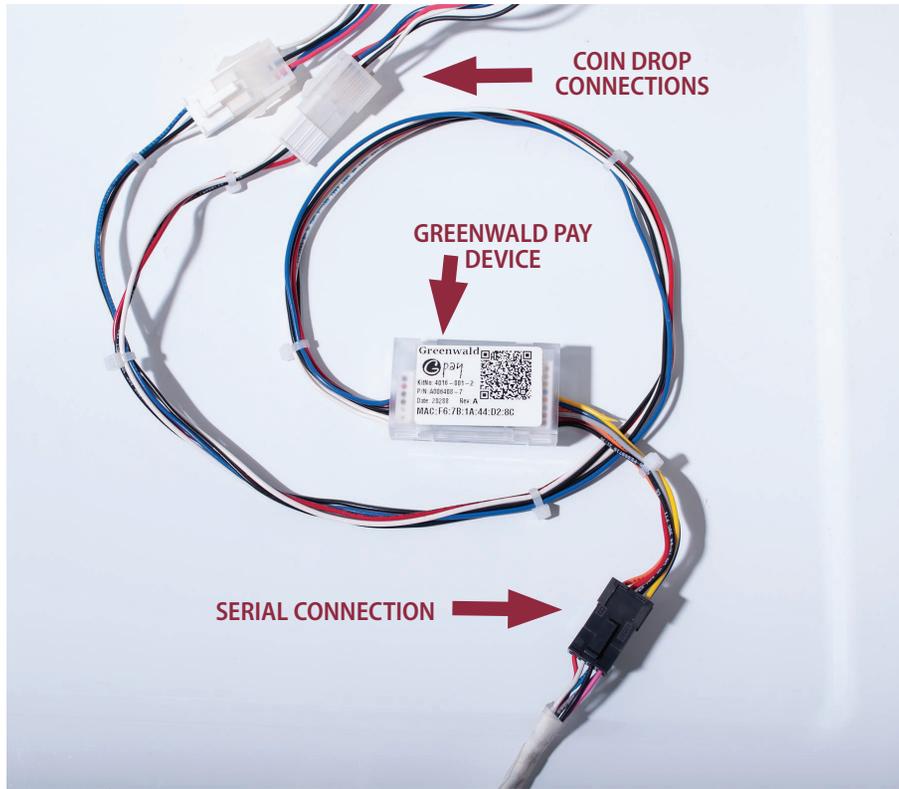

Greenwald Pay Installation Instructions LG - Dual Coin Machines

Kit #: 4016-001-2

INS. 2476-2 Rev A



GREENWALD PAY DEVICE LED CODES

COLOR	ACTIVITY	SIGNIFICANCE
Off	Off	Device not connected to power
White	Slow Blink	Device not configured
Blue	Steady	Selected during configuration
Yellow	Slow Blink	Loading machine configuration
Green	Steady	Configured & ready
Blue	Slow Blink	Active with phone app
Green	Fast Blink	Active, Start not pressed
Green	Slow Blink	Busy, machine running
Red	Slow Blink	Machine Error
Red	Fast Blink	Machine Interface Error
Blue/Green	Slow Toggle	Firmware Loading
Red	Steady	Firmware Error

EN21-106

Tools Needed for Installation



- Greenwald Pay machine labels
- Appropriate tool to open machine panel
- Smart phone

Greenwald Industries

212 Middlesex Avenue | Chester, CT 06412 USA
800-221-0982 | www.greenwaldindustries.com



1

IMPORTANT: For seamless installation, set-up room and machine profiles in Greenwald Management System (GMS) prior to device installation.


2

Disconnect power to machine.
Open console panel and plug serial harness from Greenwald Pay device into the serial plug from the machine.



3

Connect the coin harnesses from the Greenwald Pay device into the coin drops on the machine.

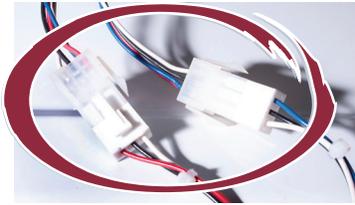

4

Leave console panel open and re-power the machine. After initialization, the Greenwald Pay device will slow blink white indicating device not configured and is ready to be paired with the profiles set up in GMS.

5

Configure Machines


Login to the Greenwald Pay app using your admin credentials > Select "Setup"

Note: Machine Profiles must be configured in GMS, before you can pair the machines




6

Select your account



7

Select your location



8

Choose machines to pair



9



Label each washer and dryer with machine number labels as you configure each machine



Note: MAC address on device and in app must match for machines to be paired correctly.

10

Repeat for each machine



11

Close all machine console panels and the install is complete.
Call Greenwald Customer Service for additional help
800-221-0982