


INSTALLATION DIAGRAM

The Greenwald Pay Plus device installs in-between the machine control panel and card reader

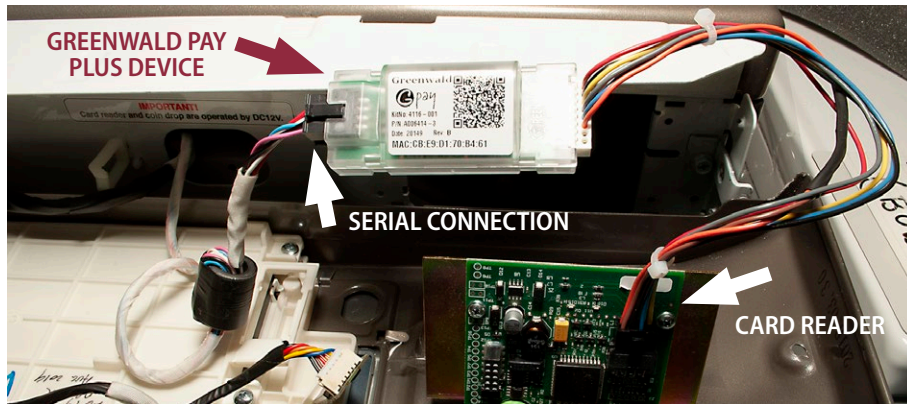


Greenwald Pay Plus Installation Instructions LG Machines

Kit #: 4116-001

INS. 2476-1 Rev A

GREENWALD PAY PLUS DEVICE LED CODES

COLOR	ACTIVITY	SIGNIFICANCE
Off	Off	Device not connected to power
White	Slow Blink	Device not configured
Blue	Steady	Selected during configuration
Yellow	Slow Blink	Loading machine configuration
Green	Steady	Configured & ready
Blue	Slow Blink	Active with phone app
Green	Fast Blink	Active, Start not pressed
Green	Slow Blink	Busy, machine running
Red	Slow Blink	Machine Error
Red	Fast Blink	Machine Interface Error
Blue/Green	Slow Toggle	Firmware Loading
Red	Steady	Firmware Error

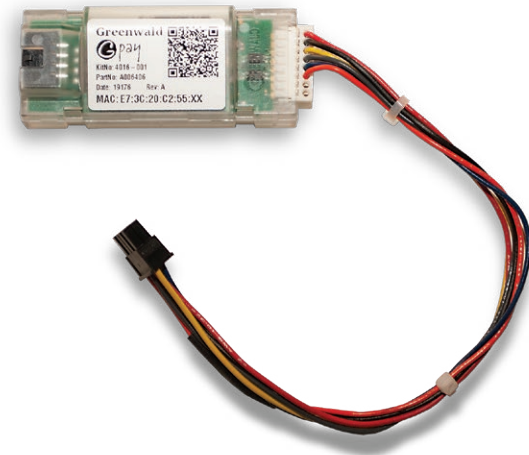

MACHINE ERROR CODES

ERROR CODE	SIGNIFICANCE	RESOLUTION
CRE	Card Reader Error. Disconnection detected	Re-connect card reader harness

EN24-115

Tools Needed for Installation



- Greenwald Pay machine labels
- Appropriate tool to open machine panel
- Smart phone


Greenwald Industries

212 Middlesex Avenue | Chester, CT 06412 USA
800-221-0982 | www.greenwaldindustries.com



1 **IMPORTANT:** For seamless installation, set-up room and machine profiles in Greenwald Management System (GMS) prior to device installation.

2 **Disconnect power to machine.**
Open console panel on machine.
Disconnect the machine wire harness from card reader

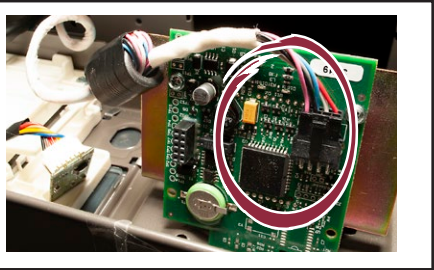

3 Re-connect the machine harness into Greenwald Pay Plus device



4 Connect the Greenwald Pay Plus harness into card reader




5 Secure the Greenwald Pay Plus device with double-sided tape (included)




6 Leave console panel open and re-power the machine. After initialization, the Greenwald Pay Plus device will slow blink white indicating device not configured and is ready to be paired with the profiles set up in GMS.


7 **Configure Machines**
Login to the Greenwald Pay app using your admin credentials > Select "Setup"
Note: Machine Profiles must be configured in GMS, before you can pair the machines



8 Select your account



9 Select your location




10 Choose machines to pair



11 Label each washer and dryer with machine number labels as you configure each machine
Note: MAC address on device and in app must match for machines to be paired correctly.



12 Repeat for each machine



13 Close all machine console panels and the install is complete.
Call Greenwald Customer Service for additional help
800-221-0982