


## INSTALLATION DIAGRAM

The Greenwald Pay device installs into the machine control board in between the dual coin device

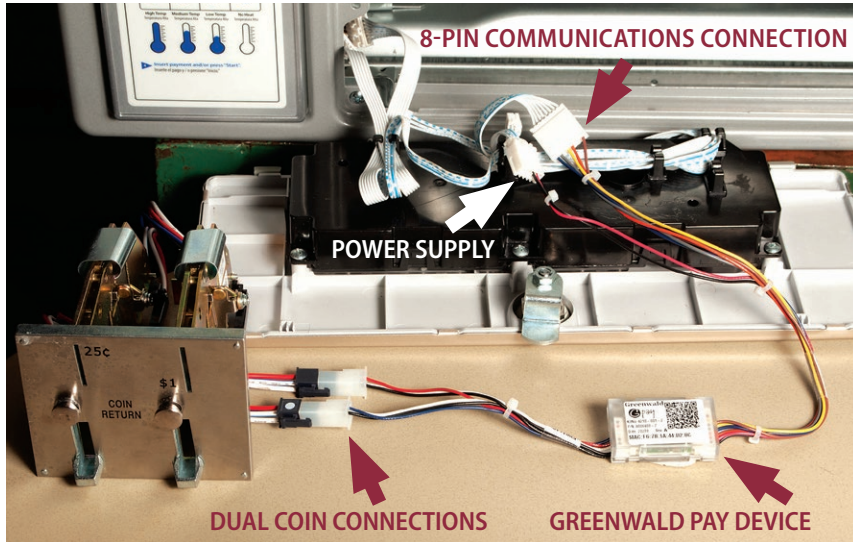

### GREENWALD PAY DEVICE LED CODES

COLOR	ACTIVITY	SIGNIFICANCE
Off	Off	Device not connected to power
White	Slow Blink	Device not configured
Blue	Steady	Selected during configuration
Yellow	Slow Blink	Loading machine configuration
Green	Steady	Configured & ready
Blue	Slow Blink	Active with phone app
Green	Fast Blink	Active, Start not pressed
Green	Slow Blink	Busy, machine running
Red	Slow Blink	Machine Error
Red	Fast Blink	Machine Interface Error
Blue/Green	Slow Toggle	Firmware Loading
Red	Steady	Firmware Error

EN21-131



Greenwald Pay  
Installation Instructions  
Encore Pulse Dryers

**Kit # 4210-001-2**

Dual Coin  
INS. 2477-1 Rev B



### Tools Needed for Installation



- Greenwald Pay machine labels
- Appropriate tool to open machine panel
- Smart phone



### Greenwald Industries

212 Middlesex Avenue | Chester, CT 06412 USA  
800-221-0982 | www.greenwaldindustries.com



1

**IMPORTANT:** For seamless installation, set-up room and machine profiles in Greenwald Management System (GMS) prior to device installation. Ensure the correct profile settings are chosen for a pulse dryer.

2


**Disconnect power to machine.**

Open console panel on machine.  
Install 8-pin communications connector from the Greenwald Pay device into the machine control



3


Connect Greenwald Pay power plug to machine's power supply.



4

Plug in the dual coin connectors from the Greenwald Pay device into the dual coin device installed in the machine.

Blue Cable = Coin 1  
Red Cable = Coin 2

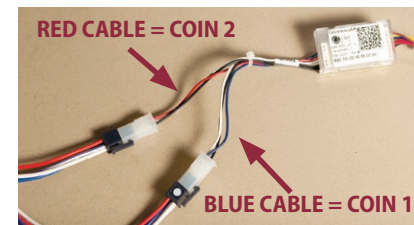

5


Leave console panel open and re-power the machine. After initialization, the Greenwald Pay device will slow blink white indicating device not configured and is ready to be paired with the profiles set up in GMS.

6

**Configure Machines**


Login to the Greenwald Pay app using your admin credentials > Select "Setup".

*Note: Machine Profiles must be configured in GMS, before you can pair the machines.*




7

Select your account



8

Select your location



9

Choose machines to pair



10




Label each washer and dryer with machine number labels as you configure each machine.

*Note: MAC address on device and in app must match for machines to be paired correctly.*

11

Repeat for each machine



12

Close all machine console panels and the install is complete.  
Call Greenwald Customer Service for additional help 800-221-0982