


## Maytag Greenwald Pay configurations

### Note:

**Part # 4003-001 will not include the coin harness**

**Part # 4003-002 will include the coin harness as shown  
below**

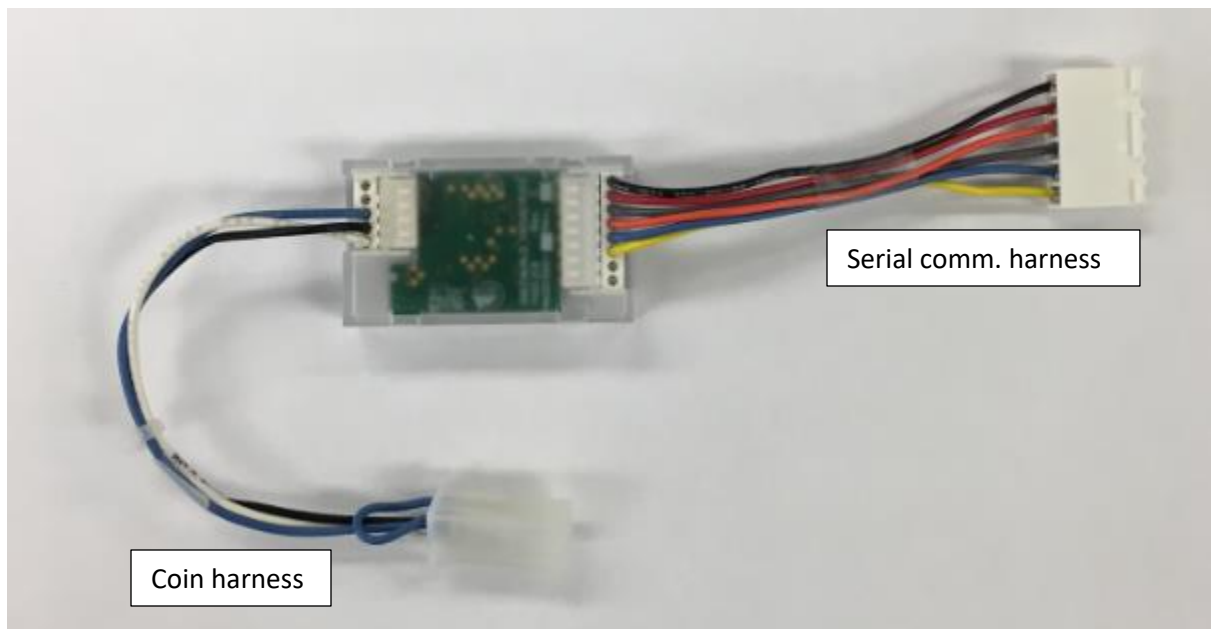

1. Disconnect power to the machine.
2. Open control console panel.


## Greenwald Pay device installation instruction for Maytag laundry machines (4003-001, 002)



3. Install Serial communications connector from the Greenwald Pay device into the machine control board "AA3". (4003-001, 002) Machine control board connector location will vary.



4. (4003-002) (Machines with a coin drop system) The coin system will have to be disconnect from the machine control board and plugged into the Greenwald Pay coin harness. The location of the coin connector on the machine control board will vary, but it will be labeled "COIN1"

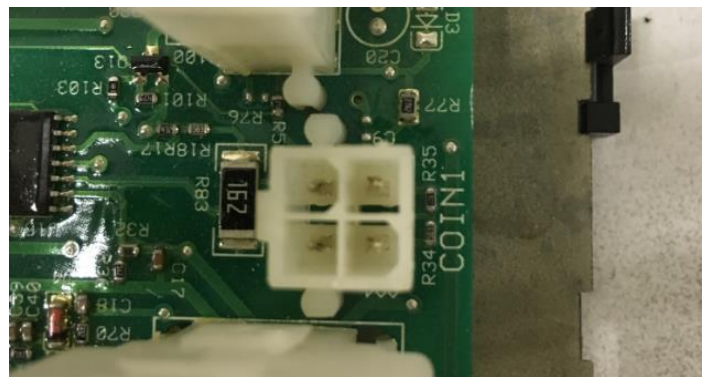

5. Leave console panel open and repower the machine. The Greenwald Pay device should slow blink white indicating device not configured.
6. Follow Greenwald pay device configuration instructions located in the pamphlet or go to [www.greenwaldindustries.com/gpay-help](http://www.greenwaldindustries.com/gpay-help)